

Cylinders and mountings conform to ISO 15552

Complete functional unit

Integrated 5/2 or 5/3 valve

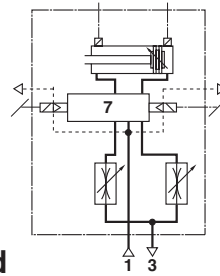
Additional output ports (2 & 4)

Integrated flow regulator for speed control

Reed or electronically switches can be mounted flush with the profile barrel

Protection class IP65

Energy efficient



Technical features

Medium:

Compressed air, filtered, lubricated or non-lubricated
 Particles size: Class 7, ISO 8573 – 1 (dated 2001)
 Humidity and water content: Air supply must be dry.
 Corresponding of the application and working conditions the air must be dry enough to avoid condensate. The pressure dewpoint must be minimum 15° under the application and working conditions. Oil: Class 4, ISO 8573 – 1 (dated 2001)

Standard:

Based on ISO 15552 (length, mounting pitch and thread dimensions according to ISO 15552. Some outside dimensions different to ISO 15552)

Operation:

Double acting, magnetic piston, adjustable cushioning

Operating pressure:

2 ... 8 bar

Port size:

G1/8, G1/4, G3/8

Cylinder diameters:

32, 40, 50, 63, 80, 100 mm

Standard strokes:

See below

Non-standard strokes:

Available (25 ... 1000 mm)

Operating temperature:

-5 ... +80°C max.

Supply voltage:

24 V d.c. (±10 %)

(other voltages supply on request)

Power consumption:

2 W max

Electrical connection:

DIN EN175301-803, form C

Manual override:

Turn and look

Rating:

100 % E.D.

Protection class:

IP 65

Materials:

Profile barrel: anodised aluminium,
 End covers: pressure diecast anodised aluminium
 Piston rod: stainless steel, see page 2
 Piston rod seals: polyurethane
 Piston seals: polyurethane
 O-rings: nitrile rubber

Technical data

Cylinder Ø (mm)	32	40	50	63	80	100
Air ports	G 1/8	G 1/8	G 1/8	G 1/4	G 1/4	G 3/8
Piston rod Ø (mm)	12	16	20	20	25	25
Piston rod thread	M10 x 1,25	M12 x 1,25	M16 x 1,5	M16 x 1,5	M20 x 1,5	M20 x 1,5
Cushion length (mm)	19	22	24	24	27	34
Theoretical thrusts at 6 bar outstroke N	482	754	1178	1870	3016	4710
Theoretical thrusts at 6 bar instroke N	414	633	990	1680	2722	4416
Air consumption at 6 bar outstroke l/cm	0,056	0,088	0,137	0,218	0,350	0,550
Air consumption at 6 bar instroke l/cm	0,050	0,076	0,117	0,198	0,324	0,514

Standard strokes

Cylinder Ø (mm)	Strokes (mm)											
	25	50	80	100	125	160	200	250	320	400	500	
32	•	•	•	•	•	•	•	•	•	•	•	
40	•	•	•	•	•	•	•	•	•	•	•	
50	•	•	•	•	•	•	•	•	•	•	•	
63	•	•	•	•	•	•	•	•	•	•	•	
80	•	•	•	•	•	•	•	•	•	•	•	
100	•	•	•	•	•	•	•	•	•	•	•	

Cylinder variants

Symbol	R	S	C	D	Model with magnetic piston	Description	Dimensions Page
	•	•	•	•	PRA/862000/MI	Standard cylinder	7
	•	•	•	•	PRA/862000/W2	Cylinder with special wiper/seal (suitable for appl. with cement, plaster (stucco), arizona sand, hoar-frost or ice)	7
	•	•	•	•	PRA/862000/MU	Cylinder with extended piston rod	7
	•	•	•	•	PRA/862000/MG	Cylinder with piston rod bellow	8

For the cylinder models style C, D and S see options selector

Option selector

P★A/862★/★/★/213A/★/★/★

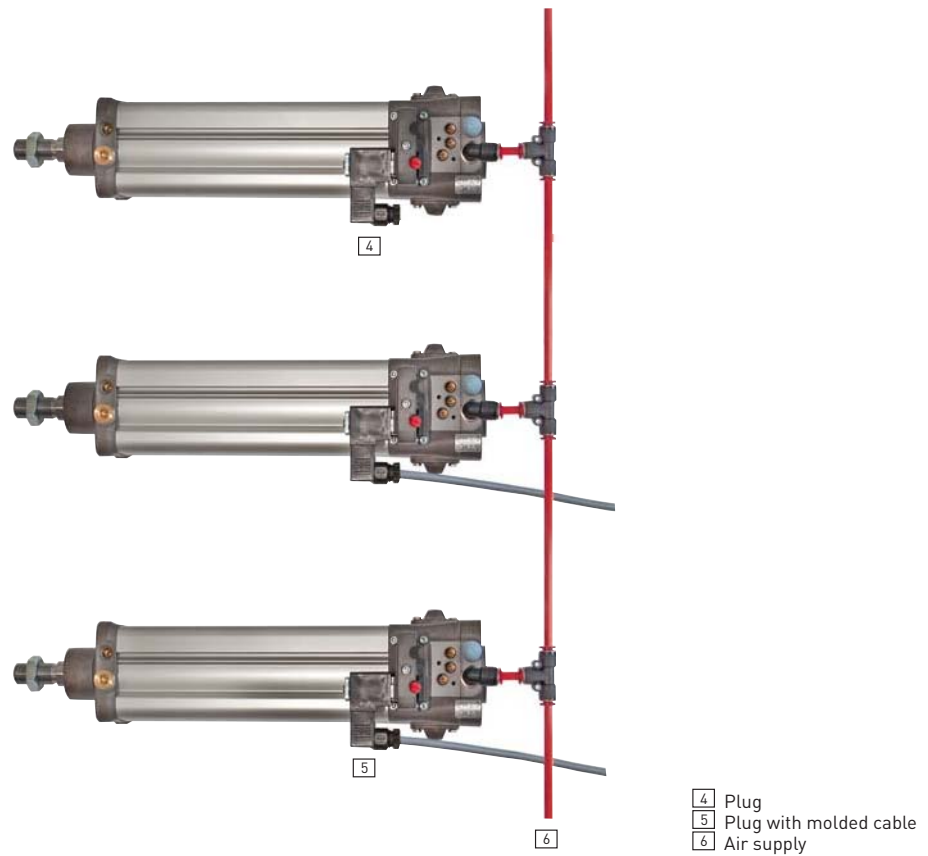
Piston rod material	Substitute
Stainless steel (martensitic); Standard wiper seal	R
Stainless steel (austenitic); Standard wiper seal	S
Hard chromium plated; Standard wiper seal	C
Stainless steel (austenitic); hard chromium plated; Standard wiper seal	D
Stainless steel (austenitic); Smooth wiper seal (orange)	V
Stainless steel (austenitic); hard chromium plated; Smooth wiper seal (orange)	E
Cylinder Ø (mm)	Substitute
032, 040, 050, 063, 080, 100	
Variants (magnetic piston)	Substitute
Standard	MI
Piston rod bellow	MG
Special wiper seal	W2
Extended piston rod	MU
P**/862***/MU/***/***/***/	
Extension (mm)	

Note: This options selector explains only the cylinder variants. For combinations of cylinder variants consult our technical Service.

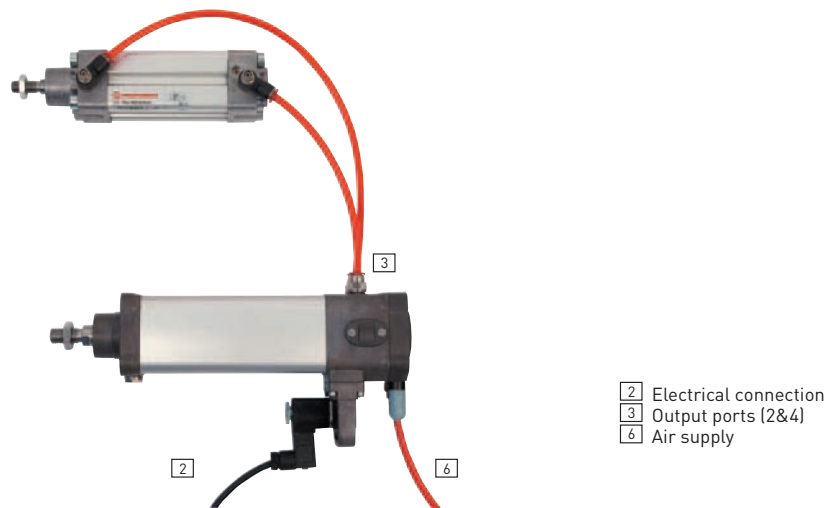
Strokes (mm)	
1000 max.	
Valve function	Substitute
5/2 way solenoid operated, spring return, cylinder instroke	R
5/2 way solenoid operated, spring return, cylinder outstroke	E
5/2 way solenoid operated, solenoid return, bistable	B
5/3 way solenoid operated, solenoid return, all ports blocked (APB)	A
5/3 way solenoid operated, solenoid return, central open exhaust (COE)	C

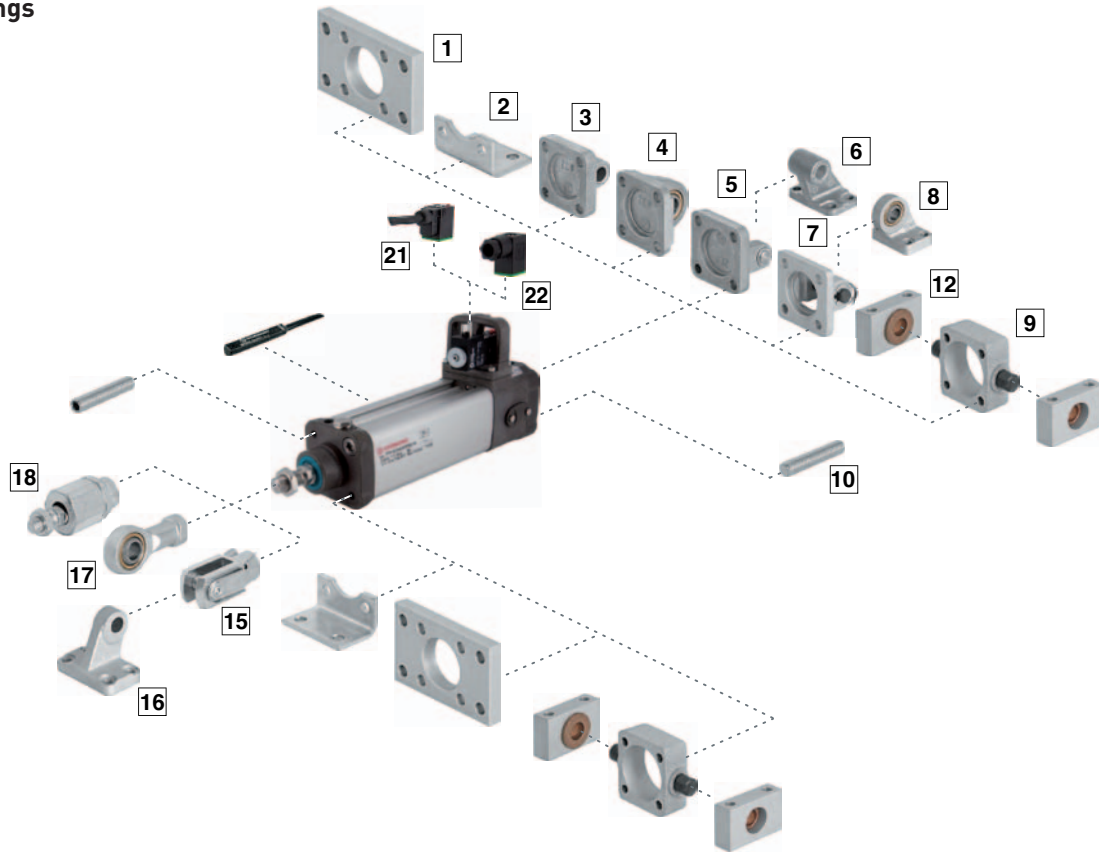
Reduced Installation Time & Cost

To connect the IVAC you simply run a single ring main to provide an air supply to each unit. There is no mounting of valve islands to the machine framework or inside a cabinet and there is no pipework to run around the machine to connect each valve to each actuator.



One of the advantages of the IVAC cylinders is to use the output ports (2 & 4) from the main valve to operate an additional cylinder.



Mountings


Position	Style	Standard	Corrosion protected
1	B, G	Clear anodised aluminium	Clear anodised aluminium. Screws: A2
2	C	Galvanized steel (ø 32 ... 63 mm) Painted steel (ø 80 & 100 mm)	—
3	R	Diecast aluminium	Black corrosion protected diecast aluminium. Certified for the food industry. Screws: A2
4	UR	Galvanized aluminium Inner ring: steel Outer ring: brass	Black corrosion protected diecast aluminium Certified for the food industry Inner ring: stainless Steel (austenitic) Outer ring: nickel plated hardened steel
5	D	Diecast aluminium Bolt: galvanized steel (martensitic) Circlip: galvanized steel	Black corrosion protected diecast aluminium Certified for the food industry Bolt: X 10 Cr Ni S 18 9 (1.4305, AISI 303) Circlip: Stainless steel (martensitic). Screws: A2
6	SW	Diecast aluminium	Black corrosion protected diecast aluminium Certified for the food industry
7	US	Galvanized aluminium. Inner ring: steel Outer ring: brass	—
8	D2	Painted cast iron. Bolt: stainless steel (martensitic) Circlip: galvanized steel	—
9	FH	Cast iron	—
10	A	Galvanized steel	—
11	Screw	—	—
12	S	Clear anodised aluminium Bearing: brass	—
15	F	Galvanized steel Bolt: galvanized steel Circlip: Galvanized steel	Nickel plated steel Circlip: X 10 Cr Ni S 18 9 (1.4305, AISI 303) Bolt: X 10 Cr Ni S 18 9 (1.4305, AISI 303)
16	SS	Painted cast iron	—
17	UF	Galvanized steel. Inner ring: steel Outer ring: brass	Nickel plated steel. Inner ring: stainless steel (austenitic) Outer ring: nickel plated hardened steel.
18	AK	Galvanized steel	—

Mountings and service kits

Model	A	AK	B, G	C	D	D2	F	FH
	10	18	1	2	5	7	15	9
∅	Page 9	Page 9	Page 9	Page 9	Page 10	Page 10	Page 10	Page 10
32	QM/8032/35	QM/8025/38	QA/8032/22	QA/8032/21	QA/8032/23	QA/8032/42	QM/8025/25	QA/8032/34
40	QM/8032/35	QM/8040/38	QA/8040/22	QA/8040/21	QA/8040/23	QA/8040/42	QM/8040/25	QA/8040/34
50	QM/8050/35	QM/8050/38	QA/8050/22	QA/8050/21	QA/8050/23	QA/8050/42	QM/8050/25	QA/8050/34
63	QM/8050/35	QM/8050/38	QA/8063/22	QA/8063/21	QA/8063/23	QA/8063/42	QM/8050/25	QA/8063/34
80	QM/8080/35	QM/8080/38	QA/8080/22	QA/8080/21	QA/8080/23	QA/8080/42	QM/8080/25	QA/8080/34
100	QM/8080/35	QM/8080/38	QA/8100/22	QA/8100/21	QA/8100/23	QA/8100/42	QM/8080/25	QA/8100/34
Corrosion protected								
32	—	—	PVQA/8032/22	—	PVQA/8032/23	—	PVQM/8025/25	—
40	—	—	PVQA/8040/22	—	PVQA/8040/23	—	PVQM/8040/25	—
50	—	—	PVQA/8050/22	—	PVQA/8050/23	—	PVQM/8050/25	—
63	—	—	PVQA/8063/22	—	PVQA/8063/23	—	PVQM/8050/25	—
80	—	—	PVQA/8080/22	—	PVQA/8080/23	—	PVQM/8080/25	—
100	—	—	PVQA/8100/22	—	PVQA/8100/23	—	PVQM/8080/25	—
Model	R	S	SS	SW	UF	UR	US	Service kit
	3	12	16	6	17	4	8	
∅	Page 11	Page 11	Page 12	Page 11	Page 11	Page 12	Page 12	
32	QA/8032/27	QA/8032/41	M/P19931	M/P19493	QM/8025/32	QA/8032/33	M/P40310	PRQA/862032/00
40	QA/8040/27	QA/8040/41	M/P19932	M/P19494	QM/8040/32	QA/8040/33	M/P40311	PRQA/862040/00
50	QA/8050/27	QA/8040/41	M/P19933	M/P19495	QM/8050/32	QA/8050/33	M/P40312	PRQA/862050/00
63	QA/8063/27	QA/8063/41	M/P19934	M/P19496	QM/8050/32	QA/8063/33	M/P40313	PRQA/862063/00
80	QA/8080/27	QA/8063/41	M/P19935	M/P19497	QM/8080/32	QA/8080/33	M/P40314	PRQA/862080/00
100	QA/8100/27	QA/8100/41	M/P19936	M/P19498	QM/8080/32	QA/8100/33	M/P40315	PRQA/862100/00
Corrosion protected								
32	PVQA/8032/27	—	—	M/P40459	PVQM/8025/32	PVQA/8032/33	—	—
40	PVQA/8040/27	—	—	M/P40460	PVQM/8040/32	PVQA/8040/33	—	—
50	PVQA/8050/27	—	—	M/P40461	PVQM/8050/32	PVQA/8050/33	—	—
63	PVQA/8063/27	—	—	M/P40462	PVQM/8050/32	PVQA/8063/33	—	—
80	PVQA/8080/27	—	—	M/P40463	PVQM/8080/32	PVQA/8080/33	—	—
100	PVQA/8100/27	—	—	M/P40464	PVQM/8080/32	PVQA/8100/33	—	—

Connectors

Plug with cable gland


22

V10027-D00

V10012-D13 (LED and VDR)

Plug with molded cable


21

V10014-D01 (LED and VDR, cable length 1 m)

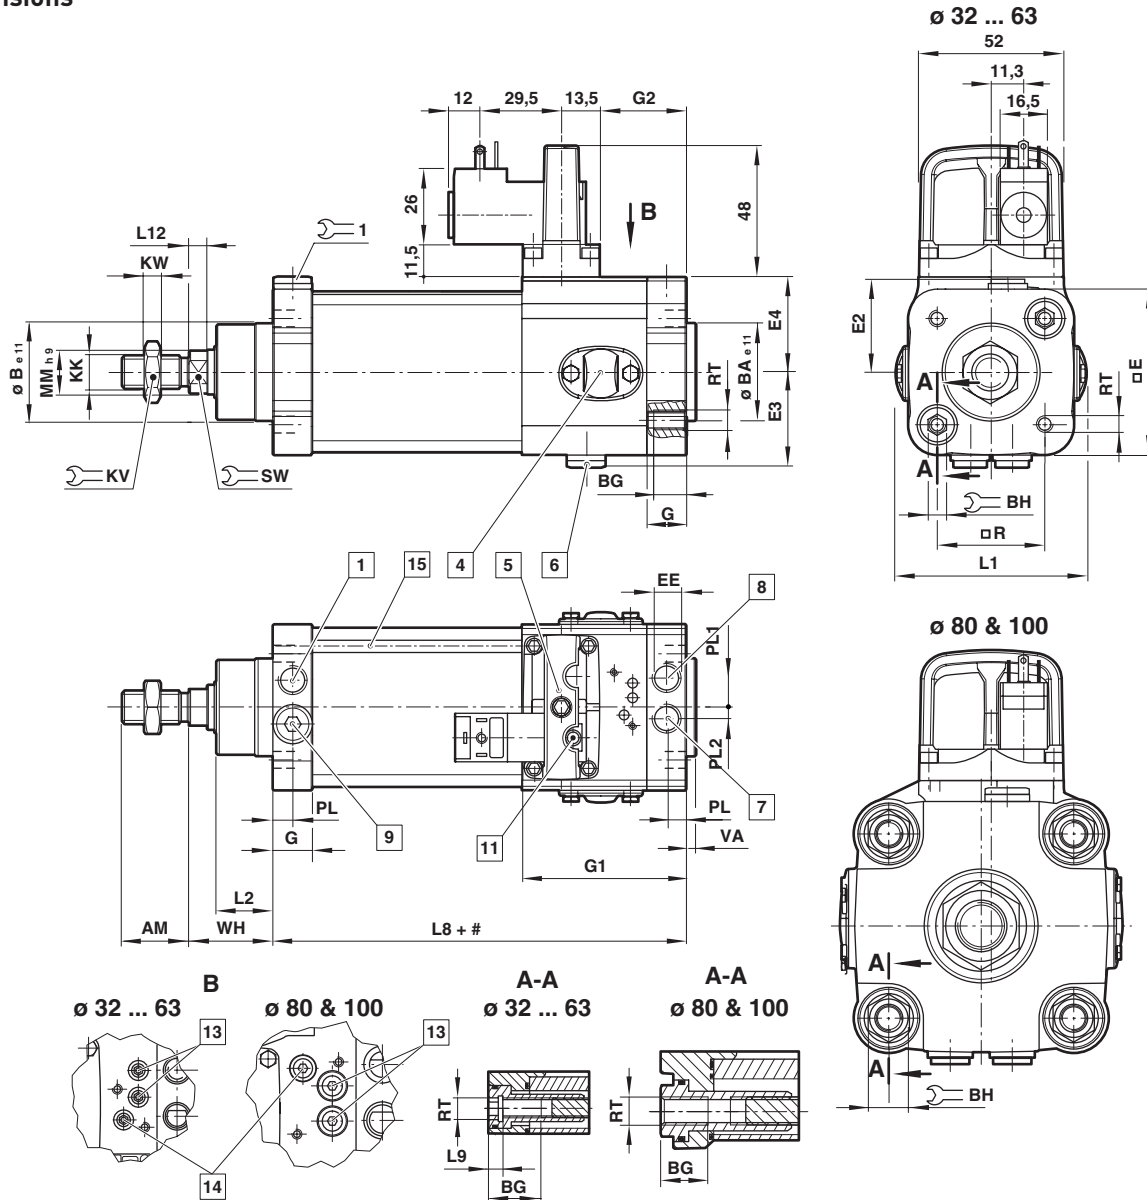
V10014-D03 (LED and varistor, cable length 3 m)

Magnetically operated switches


Model Reed	Electronic	Voltage (V a.c.)	V d.c.)	Current max. (mA)	Temperature (°C)	LED	Features	Cable length (m)	Cable type	Cable with connector	Data sheet
M/50/LSU/*V	-	10 ... 240	10 ... 170	180	-20 ... +80	•	-	2, 5 or 10	PVC 2 x 0,25	-	N/en 4.3.005
M/50/LSU/5U	-	10 ... 240	10 ... 170	180	-20 ... +80	•	-	5	PUR 2 x 0,25	-	N/en 4.3.005
M/50/RAC/5V	-	10 ... 240	10 ... 170	180	-20 ... +80	-	Changeover	5	PVC 3 x 0,25	-	N/en 4.3.005
M/50/LSU/CP	-	10 ... 60	10 ... 60	180	-20 ... +80	•	Plug M8x1	5	PVC 3 x 0,25	M/P73001/5	N/en 4.3.005
-	M/50/EAP/*V	-	10 ... 30	150	-40 ... +80 *1)	•	PNP	2, 5 or 10	PVC 3 x 0,25	-	N/en 4.3.007
-	M/50/EAP/CP	-	10 ... 30	150	-40 ... +80 *1)	•	PNP, Plug M8x1	5	PVC 3 x 0,25	M/P73001/5	N/en 4.3.007
-	M/50/EAP/CC	-	10 ... 30	150	-40 ... +80 *1)	•	PNP, Plug M12x1	5	PVC 3 x 0,25	M/P34614/5	N/en 4.3.007
-	M/50/EAN/*V	-	10 ... 30	150	-40 ... +80 *1)	•	NPN	2, 5 or 10	PVC 3 x 0,25	-	N/en 4.3.007
-	M/50/EAN/CP	-	10 ... 30	150	-40 ... +80 *1)	•	NPN, Plug M8x1	5	PVC 3 x 0,25	M/P73001/5	N/en 4.3.007

* Please insert cable length

*1) -40°C ... +80°C protection class IP65; -20°C ... +80°C protection class IP67 and IP68, details see data sheet

Dimensions


Stroke

- 1 Cushion adjustment front end cover
- 4 Main valve
- 5 Pilot block
- 6 Output ports (2&4)

7 Air supply

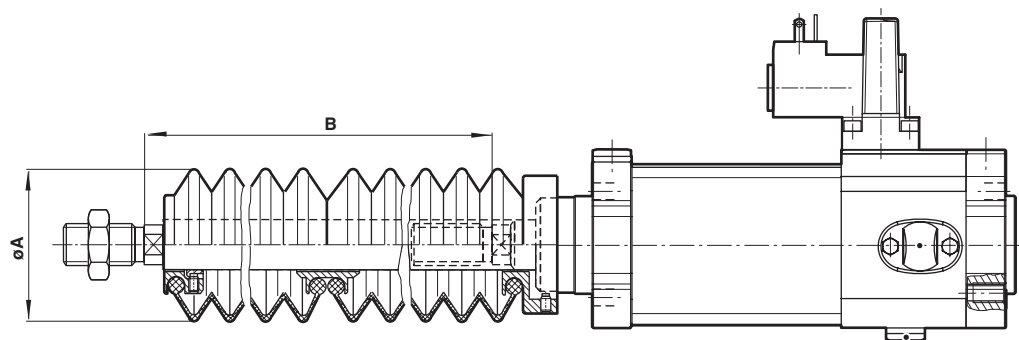
- 8 Exhaust position, do not obstruct
- 9 Without function - do not use
- 11 Manual override

13 Speed control adjustment

- 14 Cushion adjustment rear end cover
- 15 M/50 switches can be mounted flush with the profile

Ø	AM	Ø B e11	Ø BA e11	BG	BH	E	E2	E3	E4	EE	G	G1	G2	KK	KW	L1	L2	L8	L9	L12
32	22	30	30	16	6	47	27,5	27,5	27,5	G1/8	14	59	30,5	M10x1,25	5	68,5	20	94	4	6
40	24	35	35	16	6	60	34,5	34	34	G1/8	14	59	30,5	M12x1,25	6	68,5	21	105	4	6,5
50	32	40	40	16	8	71,5	40	39	39	G1/8	14	63	34,5	M16x1,5	8	92,5	28	106	5	6,5
63	32	45	45	16	8	82	46	45,5	45,5	G1/4	19	66	38	M16x1,5	8	91,5	28	121	5	6,5
80	40	45	45	17	16	99	54	54	57	G1/4	19	74,5	46,5	M20x1,5	10	110	35	128	-	7,5
100	40	55	55	17	16	119	65	65	65	G3/8	24,5	81	53	M20x1,5	10	144,5	38	138	-	10
Ø	Ø MM h9	PL	PL1	PL2	R	RT	VA	VD	WH	X1	KV	SW	1	2	at 0 mm	per 25 mm	Model			
32	12	7	10	3,5	32,5	M 6	3	6	26	0	17	10	5	12	0,66 kg	0,07 kg	PRA/862032/M1+/213A/*			
40	16	7	10,5	4	38	M 6	3,5	6	30	0	19	13	5	12	1,03 kg	0,11 kg	PRA/862040/M1+/213A/*			
50	20	7	12,5	4	46,5	M 8	3,5	6	37	1,5	24	17	5	12	1,58 kg	0,18 kg	PRA/862050/M1+/213A/*			
63	20	9,5	14,5	6	56,5	M 8	4	6	37	0	24	17	6	15	2,42 kg	0,19 kg	PRA/862063/M1+/213A/*			
80	25	9,5	14	6	72	M 10	4	6	46	6	30	22	6	15	4,12 kg	0,29 kg	PRA/862080/M1+/213A/*			
100	25	12	16,5	8,5	89	M 10	4	6	51	6,5	30	22	8	19	6,34 kg	0,35 kg	PRA/862100/M1+/213A/*			

* Please insert standard stroke length
+ Please insert valve function

P.A/862000/MG./213A/.; Zylinder mit Faltenbalg


Ø	Ø A	Max. Hub pro Balg	Kolbenstangenverlängerung B		Typ
			für den ersten Balg	für weitere Bälge	
32	40	60	30	25	P#/862032/MG+/213A/*
40	63	145	50	32	P#/862040/MG+/213A/*
50	63	145	40	32	P#/862050/MG+/213A/*
63	63	145	40	32	P#/862063/MG+/213A/*
80	80	250	50	45	P#/862080/MG+/213A/*
100	80	250	50	45	P#/862100/MG+/213A/*

* Standard-Hublänge

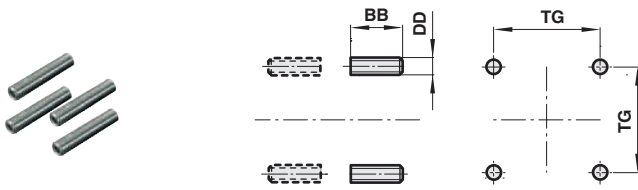
Kolbenstangenmaterial

+ Ventilfunktion

Mountings

Front or rear stud mounting A

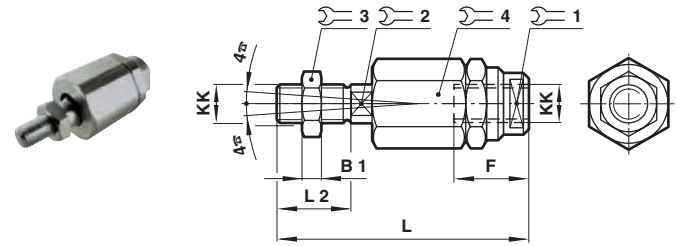
Conforms to ISO 15552, type MX1



Standard

∅	BB	DD	TG	kg	Model (A)
32/40	17	M6	32,5/38	0,02	QM/8032/35
50/63	23	M8	46,5/56,5	0,05	QM/8050/35
80/100	28	M10	72/89	0,08	QM/8080/35

Piston rod swivel AK

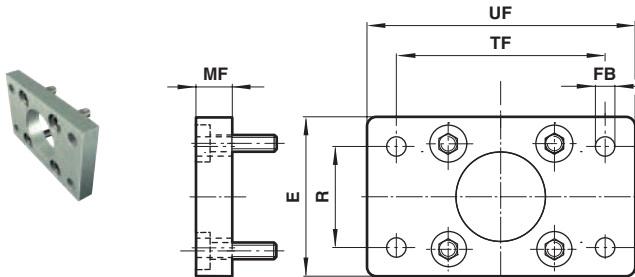


Standard

∅	KK	B1	F	L	L2	1	2	3	4	kg	Model (AK)
32	M10x1,25	5	26	73	20	19	12	17	30	0,20	QM/8025/38
40	M12x1,25	6	26	77	24	19	12	19	30	0,20	QM/8040/38
50/63	M16x1,5	8	34	106	32	30	19	24	42	0,65	QM/8050/38
80/100	M20x1,5	10	42	122	40	30	19	30	42	0,72	QM/8080/38

Front flange B, G

Conforms to ISO 15552, type MF1 and MF2



Standard

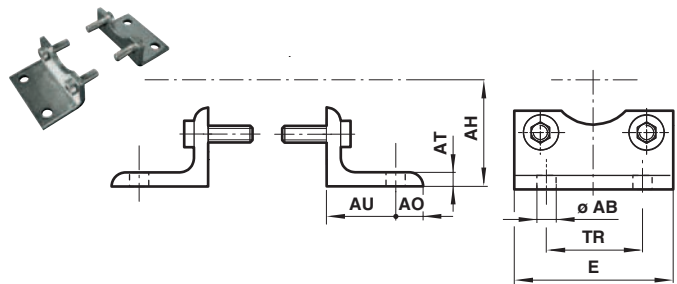
∅	E	∅ FB	MF	R	TF	UF	kg	Model (B, G)
32	50	7	10	32	64	80	0,25	QA/8032/22
40	55	9	10	36	72	90	0,35	QA/8040/22
50	65	9	12	45	90	110	0,70	QA/8050/22
63	75	9	12	50	100	125	0,80	QA/8063/22
80	100	12	16	63	126	154	1,35	QA/8080/22
100	120	14	16	75	150	186	2,20	QA/8100/22

Corrosion protected version

32	50	7	10	32	64	80	0,25	PVQA/8032/22
40	55	9	10	36	72	90	0,35	PVQA/8040/22
50	65	9	12	45	90	110	0,7	PVQA/8050/22
63	75	9	12	50	100	125	0,8	PVQA/8063/22
80	100	12	16	63	126	154	1,35	PVQA/8080/22
100	120	14	16	75	150	186	2,20	PVQA/8100/22

Foot mounting C

Conforms to ISO 15552, type MS1

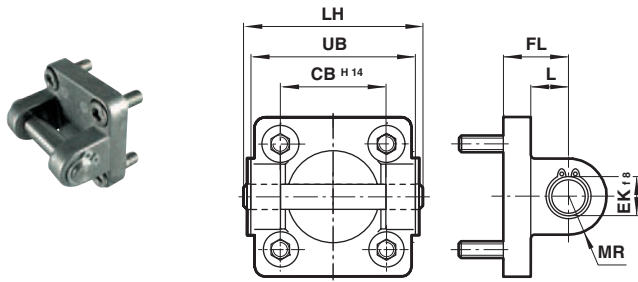


Standard

∅	∅ AB	AH	AO	AT	AU	E	TR	kg	Model (C)
32	7	32	8	4	24	48	32	0,15	QA/8032/21
40	10	36	9	4	28	53	36	0,18	QA/8040/21
50	10	45	10	5	32	64	45	0,30	QA/8050/21
63	10	50	12	5	32	74	50	0,39	QA/8063/21
80	12	63	19	5	41	98	63	0,80	QA/8080/21
100	14	71	19	5	41	115	75	0,95	QA/8100/21

Rear clevis D

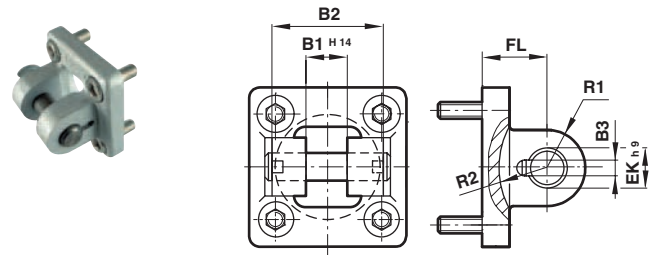
Conforms to ISO 15552, type MP2


Standard

Ø	CB ^{H14}	Ø EK ^{h9}	FL	L	LH	MR	UB	kg	Model (D)
32	26	10	22	13	52	9	45	0,11	QA/8032/23
40	28	12	25	16	60	12	52	0,16	QA/8040/23
50	32	12	27	17	68	12	60	0,22	QA/8050/23
63	40	16	32	22	79	15	70	0,34	QA/8063/23
80	50	16	36	22	99	15	90	0,54	QA/8080/23
100	60	20	41	27	119	20	110	0,90	QA/8100/23
Corrosion protected version									
32	26	10	22	13	52	9	45	0,11	PVQA/8032/23
40	28	12	25	16	60	12	52	0,16	PVQA/8040/23
50	32	12	27	17	68	12	60	0,22	PVQA/8050/23
63	40	16	32	22	79	15	70	0,34	PVQA/8063/23
80	50	16	36	22	99	15	90	0,54	PVQA/8080/23
100	60	20	41	27	119	20	110	0,90	PVQA/8100/23

Rear clevis D2

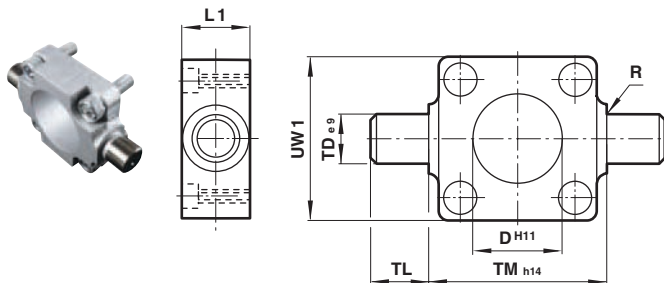
Conforms to ISO 15552, type AB6


Standard

Ø	B1 ^{H14}	B2	B3	Ø EK ^{h9}	FL	R1	R2	kg	Model (D2)
32	14	34	3,3	10	22	11	17	0,20	QA/8032/42
40	16	40	4,3	12	25	12	20	0,23	QA/8040/42
50	21	45	4,3	16	27	14,5	22	0,36	QA/8050/42
63	21	51	4,3	16	32	18	25	0,55	QA/8063/42
80	25	65	4,3	20	36	22	30	0,90	QA/8080/42
100	25	75	4,3	20	41	22	32	1,45	QA/8100/42

Front or rear detachable trunnion FH

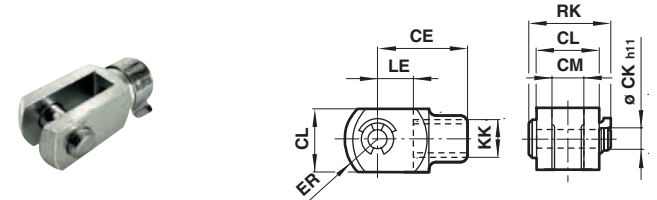
Conforms to VDMA 24562 part 2, type MT 5/6


Standard

Ø	Ø Dh11	L1	R	Ø TD ^{ø9}	TL	TM ^{h14}	UW1	kg	Model (FH)
32	30	16	1	12	12	50	45	0,20	QA/8032/34
40	35	20	1,6	16	16	63	55	0,38	QA/8040/34
50	40	24	1,6	16	16	75	65	0,60	QA/8050/34
63	45	24	1,6	20	20	90	75	1,10	QA/8063/34
80	45	28	1,6	20	20	110	100	1,90	QA/8080/34
100	55	38	2	25	25	132	120	3,50	QA/8100/34

Piston rod clevis F

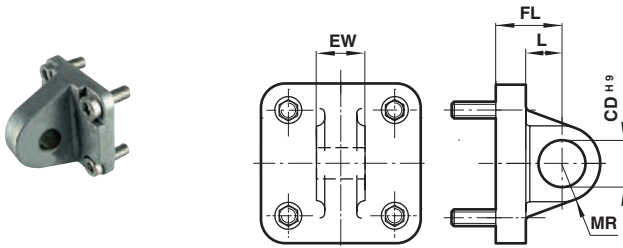
Conforms to DIN ISO 8140


Standard

Ø	KK	CE	Ø CK ^{h11}	CL	CM	ER	LE	RK	kg	Model (F)
32	M10x1,25	40	10	20	10	16	20	28	0,09	QM/8025/25
40	M12x1,25	48	12	24	12	19	24	32	0,13	QM/8040/25
50/63	M16x1,5	64	16	32	16	25	32	41,5	0,33	QM/8050/25
80/100	M20x1,5	80	20	40	20	32	40	50	0,67	QM/8080/25
Corrosion protected version										
32	M10x1,25	40	10	20	10	16	20	28	0,09	PVQM/8032/25
40	M12x1,25	48	12	24	12	19	24	32	0,13	PVQM/8040/25
50/63	M16x1,5	64	16	32	16	25	32	41,5	0,33	PVQM/8050/25
80/100	M20x1,5	80	20	40	20	32	40	50	0,67	PVQM/8080/25

Rear eye R

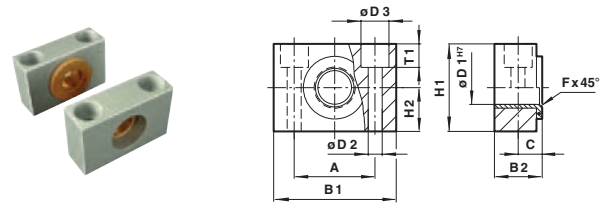
Conforms to ISO 15552, type MP4


Standard

∅	∅ CD ^{H9}	EW	FL	L	MR	kg	Model (R)
32	10	25,8	22	13	9	0,09	QA/8032/27
40	12	27,8	25	16	12	0,11	QA/8040/27
50	12	31,7	27	17	12	0,17	QA/8050/27
63	16	39,7	32	22	15	0,24	QA/8063/27
80	16	49,7	36	22	15	0,37	QA/8080/27
100	20	59,7	41	27	20	0,59	QA/8100/27
Corrosion protected version							
32	10	25,8	22	13	9	0,09	PVQA/8032/27
40	12	27,8	25	16	12	0,11	PVQA/8040/27
50	12	31,7	27	17	12	0,17	PVQA/8050/27
63	16	39,7	32	22	15	0,24	PVQA/8063/27
80	16	49,7	36	22	15	0,37	PVQA/8080/27
100	20	59,7	41	27	20	0,59	PVQA/8100/27

Trunnion support S

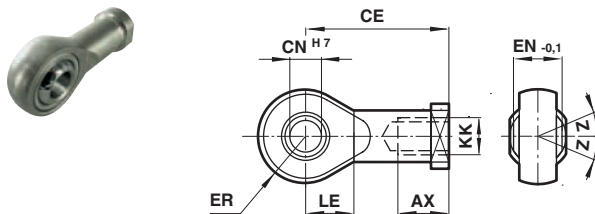
Conforms to ISO 15552, type AT4


Standard

∅	A	B1	B2	C	∅ D1 ^{H7}	∅ D1	∅ D3	Fx 45°	H1	H2	T1	kg	Model (S)
32	32	46	18	10,5	12	6,6	11	1	30	15	6,8	0,10	QA/8032/41
40/50	36	55	21	12	16	9	15	1,6	36	18	9	0,14	QA/8040/41
63/80	42	65	23	13	20	11	18	1,6	40	20	11	0,18	QA/8063/41
100	50	75	28,5	16	25	14	20	2	50	25	13	0,34	QA/8100/41

Universal piston rod eye UF

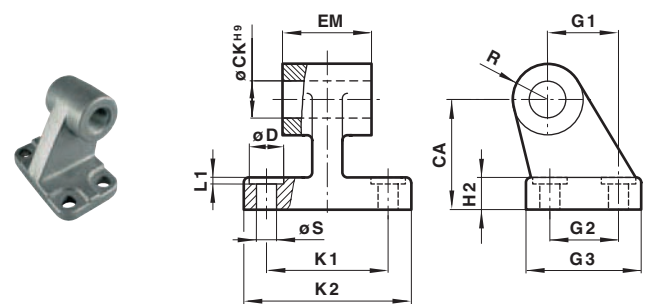
Conforms to DIN ISO 8139


Standard

∅	Thread KK	AX	CE	∅ CN ^{H7}	EN ^{-0,1}	ER	LE	Z	kg	Model (UF)
32	M10x1,25	20	43	10	14	14	15	13°	0,09	QM/8025/32
40	M12x1,25	22	50	12	16	16	17	13°	0,13	QM/8040/32
50/63	M16x1,5	28	64	16	21	21	22	15°	0,33	QM/8050/32
80/100	M20x1,5	33	77	20	25	25	26	15°	0,67	QM/8080/32
Corrosion protected version										
32	M10x1,25	20	43	10	14	14	15	13°	0,09	PVQM/8025/32
40	M12x1,25	22	50	12	16	16	17	13°	0,13	PVQM/8040/32
50/63	M16x1,5	28	64	16	21	21	22	15°	0,33	PVQM/8050/32
80/100	M20x1,5	33	77	20	25	25	26	15°	0,40	PVQM/8080/32

Wide hinge SW

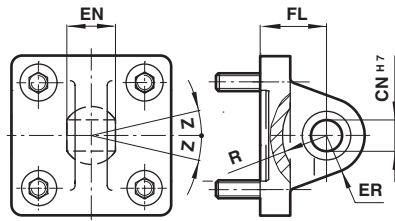
Conforms to ISO 15552, type AB7


Standard

∅	CA	∅ CK ^{H9}	∅ D	H2	EM	G1	G2	G3	K1	K2	L1	R	∅ S	kg	Model (SW)
32	32	10	11	7	25,5	21	18	31	38	50	1,6	10	6,6	0,05	M/P19493
40	36	12	11	9	27,5	24	22	35	41	54	1,6	11	6,6	0,07	M/P19494
50	45	12	15	11	31,5	33	30	45	50	65	1,6	13	9	0,14	M/P19495
63	50	16	15	12	39,5	37	35	50	52	67	1,6	15	9	0,18	M/P19496
80	63	16	18	14	49,5	47	40	60	66	84	2,5	15	11	0,28	M/P19497
100	71	20	18	15	59,5	55	50	70	76	94	2,5	19	11	0,42	M/P19498
Corrosion protected version															
32	32	10	11	8	26,5	21	18	31	38	51	1,6	10	6,6	0,05	M/P40459
40	36	12	11	10	28,5	24	22	35	41	54	1,6	11	6,6	0,07	M/P40460
50	45	12	15	12	32,5	33	30	45	50	65	1,6	13	9	0,14	M/P40461
63	50	16	15	12	40,5	37	35	50	52	67	1,6	15	9	0,18	M/P40462
80	63	16	18	14	50,5	47	40	60	66	86	2,5	15	11	0,28	M/P40463
100	71	20	18	15	60,5	55	50	70	76	96	2,5	19	11	0,42	M/P40464

Universal rear eye UR

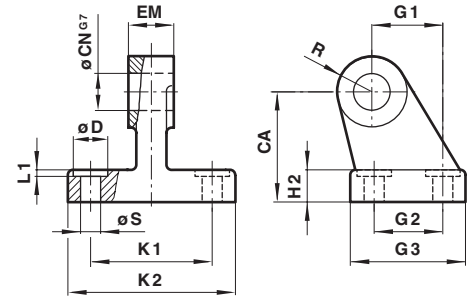
Conforms to ISO 15552, type MP6



Standard

∅	∅ CN ^{H7}	EN	ER	FL	R	Z	kg	Model (UR)
32	10	14	16	22	14,5	13°	0,15	QA/8032/33
40	12	16	18	25	18	13°	0,25	QA/8040/33
50	16	21	21	27	19	15°	0,40	QA/8050/33
63	16	21	23	32	24	15°	0,55	QA/8063/33
80	20	25	28	36	24	15°	0,90	QA/8080/33
100	20	25	30	41	29	15°	1,50	QA/8100/33
Corrosion protected version								
32	10	14	16	22	14,5	13°	0,15	PVQA/8032/33
40	12	16	19	25	18	13°	0,25	PVQA/8040/33
50	16	21	21	27	19	13°	0,4	PVQA/8050/33
63	16	21	24	32	24	15°	0,55	PVQA/8063/33
80	20	25	28	36	24	15°	0,9	PVQA/8080/33
100	20	25	30	41	29	15°	1,5	PVQA/8100/33

Narrow hinge SS

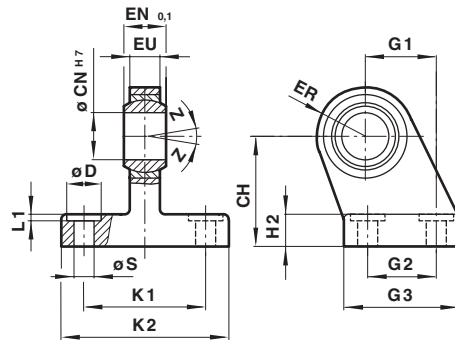


Standard

∅	CA	∅ CN ^{G7}	∅ D	H2	EM	G1	G2	G3	K1	K2	L1	R	∅ S	kg	Model (SS)
32	32	10	11	8	10	21	18	31	38	51	1,6	10	6,6	0,15	M/P19931
40	36	12	11	10	12	24	22	35	41	54	1,6	11	6,6	0,20	M/P19932
50	45	16	15	12	16	33	30	45	50	65	1,6	13	9	0,48	M/P19933
63	50	16	15	12	16	37	35	50	52	67	1,6	15	9	0,50	M/P19934
80	63	20	18	14	20	47	40	60	66	86	2,5	15	11	0,75	M/P19935
100	71	20	18	15	20	55	50	70	76	96	2,5	19	11	1,20	M/P19936

Swivel hinge US

Conforms to VDMA 24562 part 2



Standard

∅	CH	∅ CN ^{H7}	∅ D	EN ^{-0,1}	ER	EU	G1	G2	G3	H2	K1	K2	L1	∅ S	Z	kg	Model (US)
32	32	10	11	14	16	10,5	21	18	31	10	38	51	1,6	6,6	13°	0,19	M/P40310
40	36	12	11	16	18	12	24	22	35	10	41	54	1,6	6,6	13°	0,24	M/P40311
50	45	16	15	21	21	15	33	30	45	12	50	65	1,6	9	13°	0,46	M/P40312
63	50	16	15	21	23	15	37	35	50	12	52	67	1,6	9	15°	0,59	M/P40313
80	63	20	18	25	28	18	47	40	60	14	66	86	2,5	11	15°	1,03	M/P40314
100	71	20	18	25	30	18	55	50	70	15	76	96	2,5	11	15°	1,40	M/P40315

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features**«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems, or other applications not within published specifications, consult NORGREN.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.